

Rod-Conveyor for egg collection




The LUBING rod-conveyer was designed to be easily and therefore inexpensively installed. The design

makes it easy to adapt the conveyer to any given situation. The heart of the system is the mounted conveyer

belt which due to arrangement minimizes the number of damaged eggs. It is made out of stabilized plastic pipes which are connected by chains on both sides.


The belt is guided by profiles made from galvanized steel which are connected to each other by floor supports that can be changed in height.

Due to the distance between the pipes smaller eggs will not fall through the belt even at a gradient of 20°.

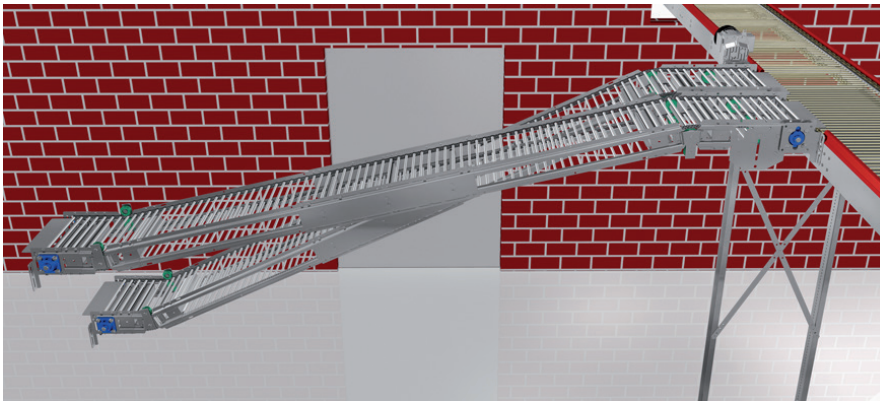

System width

Width	Capacity
350 mm	30.000 Eggs/h
500 mm	45.000 Eggs/h

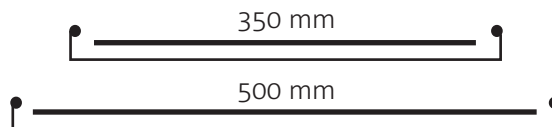

The drive units


up to 40 m



up to 60 m



from 60 to 100 m



For further information: www.lubing.com

Technical modifications reserved.



LUBING Maschinenfabrik GmbH & Co. KG

Lubingstraße 6 · 49406 Barnstorf (Germany)

Tel.: +49 (0) 54 42 - 98 79-0 · Fax: +49 (0) 54 42 - 98 79-33

www.lubing.com · info@lubing.com

**Drinking-Systems
Conveyor-Systems
Climate-Systems**